

levels are exceeded Armstrong can also recommend additional harmonic mitigation

and the costs for such mitigation.

# DESIGN ENVELOPE 4300 VIL 2019-500.0 SUBMITTAL

File No: 101.5375

Date: AUGUST 1, 2018

Supersedes: 101.5233

Date: MARCH 30, 2018

Job:	Repres	entative:	
	Order	No:	Date:
Engineer:	Submit	ted by:	Date:
Contractor:	Approv	ved by:	Date:
PUMP DESIGN DATA	:	CONTROLS DATA	
No. of pumps: Tag:		Orientation:	☐ L1 (default) ☐ L2 ☐ L3 ☐ L4
Capacity:USgpm (L/s) Head:	ft (m)	Protocol (standard):	☐ BACnet <sup>™</sup> MS/TP
Liquid: Viscosity:	:		☐ BACnet™ TCP/IP
Temperature: °F (°C) Specific gravity	y:		☐ Modbus RTU
Suction: 20" (500 mm) Discharge: 20	" (500 mm)	Enclosure:	☐ Indoor - UL TYPE 12
OSHPD Seismic Certification OSP-0422-10 UL STD 778 & CSA STD C22.2 NO.108 certified Test report is supplied with each pump		Fused disconnect switch:	
		емі/RFI control:	Integrated filter designed to meet EN61800-3
MOTOR DESIGN DATA  HP: RPM: Frame size: Enclose  Volts: Hertz: 60 Hz Phase: 3	ure:	Harmonic suppression:	Dual Dc-link reactors (Equivalent: 5% Ac line reactor) Supporting IEEE 519-1992 requirements**
Efficiency: NEMA premium 12.12		Cooling:	Fan-cooled through back channel
MAXIMUM PUMP OPERATING CONDITIO	NS	Ambient temperature:	-10°C to +45°C up to 1000 meters above sea level (+14°F to +113°F, 3300 ft)
ANSI 125 - (CONSTRUCTION: BF)		Analog I/O	Two current or voltage inputs,
175 psig at 150°F (12 bar at 65°C) 100 psig at 300°F (7 bar at 150°C)		/ maiog i/ or	one speed output
100 psig at 300 F (7 bai at 150 C)		Digital ı/o:	Two inputs, two outputs
ANSI 250 - (CONSTRUCTION: DBF)	:	Pulse inputs:	Two programmable
375 psig at 150°F (26 bar at 65°C) 260 psig at 300°F (21 bar at 150°C)		Relay outputs:	Two programmable
		Communication port:	1-RS485
MECHANICAL SEAL DESIGN DATA	•		
See file no. 43.50 for standard mechanical seal defindicated below Armstrong seal reference number	tails as	guaranty performance to any syst a system wide specification. If sup	ve via built-in DC line reactors. This does not em wide harmonic specification or the costs to m oplied with the system electrical details, Armstror the system wide harmonics. If system harmonic

## FLOW READOUT ACCURACY

☐ Others: \_\_\_

□ c1 (a)

The Design Envelope model selected will provide flow reading on the controls local keypad & digitally for the BMS. The model readout will be factory tested to ensure  $\pm 5\%$  accuracy.

2

# **OPTIONS**

# SENSORLESS BUNDLE (STANDARD)



Operation of pump without a remote sensor. Includes:

- Sensorless control
- Flow readout
- Constant flow
- Constant pressure

Minimum system pressure to be maintained ft (m)

\* If minimum maintained system pressure is not known: Default to 40% of design head

## □ PARALLEL SENSORLESS



Operation of multiple pumps without a remote sensor

Minimum system pressure to be maintained ft (m)

\* If minimum maintained system pressure is not known: Default to 40% of design head

### ☐ ENERGY PERFORMANCE BUNDLE



Provides energy savings on oversized systems by adjusting pump parameters to on-site conditions. Includes:

- Auto-flow balancing Automatically determines control curve between design flow at on-site system head, and minimum (zerohead) flow for energy savings
- Maximum flow control Limits flow rate to pre-set maximum for potential energy savings

Maximum flow rate gpm (L/s)

\*Only available if sensorless bundle is enabled

#### □ PROTECTION BUNDLE



Protects other flow sensitive equipment by setting limits of pump operation. Includes:

- Minimum flow control Attempts to maintain flow rate to pre-set minimum to protect equipment in system
- Bypass valve control Actuates a bypass valve to protect flow sensitive equipment if pre-set minimum flow rate is reached

Minimum flow rate gpm (L/s)

# □ ZONE OPTIMIZATION BUNDLE



Controls pumps to ensure multiple zones are satisfied for heating or cooling

 2 sensor control - Controls pumps in a 2-zone application to ensure both zones are always satisfied for heating or cooling

# ☐ DUAL SEASON SETUP



Pre-sets heating and cooling parameters for pumps in 2-pipe systems

#### Cooling

Duty point	gpm (L/s) at	ft (m)
Minimum system	m pressure to be maint	ained
	ft (m)	
Heating		
Duty point	gpm (L/s) at	ft (m)
Minimum system	m pressure to be maint	ained
	ft (m)	

## **OPTIONAL SERVICES**

# **ON-SITE PUMP COMMISSIONING**



Where purchased and applicable, onsite commissioning by an Armstrong representative will include setting up communication with the Pump (not wiring to BAS), adjusting parameters to match on-site conditions, register the pumps for enhanced warranty and connect the pumps to the router as part of the activation of Pump Manager.

#### PUMP MANAGER




As a Performance Management Service, Pump Manager is an online automated fault detection and diagnostic service for sustained performance and enhanced reliability. It includes advanced trending, alerts of variance in performance and automated reports.

Available in yearly increments. Includes an option for a price discount on the Extended Warranty Service.

<sup>\*</sup>Only available if sensorless bundle is enabled

<sup>\*</sup>The Service requires an active internet connection.


3

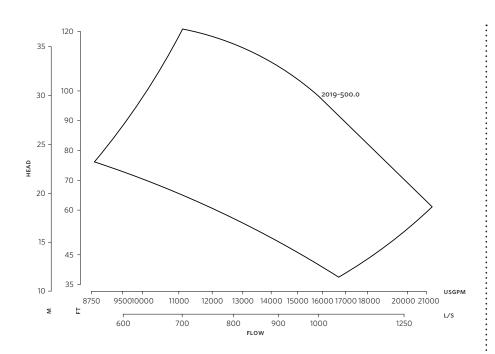


Performance curves are for reference only.

Confirm current performance data with Armstrong ACE Online selection software.

## INDOOR

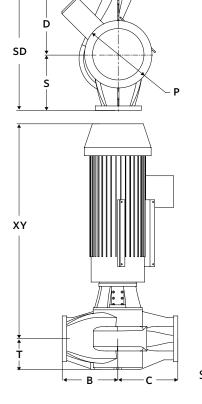

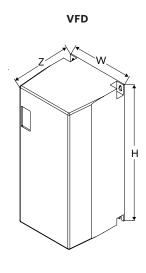

See file no. 94.65 for VFD dimensions

#### **DIMENSION DATA**

#### INDOOR (UL TYPE 12/ODP)

Frame size: 500

**Size:** 20 × 20 × 19

**HP:** 500 **RPM:** 1200

**B:** 31.00(787)

**c:** 20.00(508)

**D:** 48.00(1219)

**P:** 34.00(864)

s: 40.00(1016)

**sp:** 88.00(2235)

**T:** 19.88(505)


**XY:** 108.50(2756)

Weight: 11040(5007.7)

Dimensions - inch (mm) Weight - lbs (kg)

- Tolerance of ±0.125" (±3 mm) should be used
- For exact installation, data please write factory for certified dimensions

## **CONTROL ORIENTATIONS**



#### TORONTO

23 BERTRAND AVENUE TORONTO, ONTARIO CANADA M1L 2P3 +1 416 755 2291

#### BUFFALO

93 EAST AVENUE NORTH TONAWANDA, NEW YORK U.S.A. 14120-6594 +1 716 693 8813

#### BIRMINGHAM

HEYWOOD WHARF, MUCKLOW HILL HALESOWEN, WEST MIDLANDS UNITED KINGDOM B62 8DJ +44 (0) 8444 145 145

## MANCHESTER

WOLVERTON STREET
MANCHESTER
UNITED KINGDOM
M11 2ET
+44 (0) 8444 145 145

#### BANGALORE

#59, FIRST FLOOR, 3RD MAIN MARGOSA ROAD, MALLESWARAM BANGALORE, INDIA 560 003 +91 (0) 80 4906 3555

#### SHANGHAI

UNIT 903, 888 NORTH SICHUAN RD. HONGKOU DISTRICT, SHANGHAI CHINA 200085 +86 (0) 21 5237 0909

### SÃO PAULO

RUA JOSÉ SEMIÃO RODRIGUES AGOSTINHO, 1370 GALPÃO 6 EMBU DAS ARTES SAO PAULO, BRAZIL +55 11 4785 1330

ARMSTRONG FLUID TECHNOLOGY ESTABLISHED 1934

ARMSTRONGFLUIDTECHNOLOGY.COM

