

DESIGN ENVELOPE 4200H END SUCTION

0511-007.5 | SUBMITTAL

File No: 103.5133

Date: AUGUST 1, 2018

Supersedes: 103.5133

Date: MARCH 30, 2018

| Job: | | Representative: | |
|---|-------------------|--------------------------|---|
| | Ord | er No: | Date: |
| Engineer: Sub Contractor: App | | | |
| | | | |
| No. of pumps: | Tag: | Protocol (standard): | ☐ BACnet™ MS/TP |
| Capacity:USgpm (L/s) | Head:ft (m) | | ☐ BACnet™ TCP/IP |
| Liquid: | Viscosity: | | ☐ Modbus RTU |
| Temperature:°F (°C) | Specific gravity: | Enclosure: | ☐ Indoor - UL TYPE 12 |
| Suction: 6"(150mm) Flanged | | Fused disconnect switch: | |
| Discharge: 5"(125mm) Flanged | | емі/RFI control: | Integrated filter designed to meet EN61800-3 |
| UL STD 778 & CSA STD C22.2 NO.108 certified Test report is supplied with each pump | | Harmonic suppression: | Dual DC-link reactors (Equivalent: 5% AC line reactor) Supporting IEEE 519-1992 requirements** |
| MOTOR DESIGN DATA | | Cooling: | Fan-cooled through back channel |
| нр: 7.5 RPM: 1200 Frame size: 254тс Enclosure: тегс Volts: Hertz: 60 Hz Phase: 3 | | Ambient temperature: | -10°C to +45°C up to 1000 meters above sea level (+14°F to +113°F, 3300 ft) |
| Efficiency: NEMA premium 12.12 | | Analog ı/o: | Two current or voltage inputs, one speed output |
| | | Digital ı/o: | Two inputs, two outputs |
| MAXIMUM PUMP OPERATING CONDITIONS | | Pulse inputs: | Two programmable |
| ANSI 125 - (CONSTRUCTION: | BF) | Relay outputs: | Two programmable |
| 175 psig at 150°F (12 bar at 65°C) | | Communication port: | 1-RS485 |
| 100 psig at 300°F (7 bar at 150°C) ANSI 250 - (CONSTRUCTION: | | • | Irive via built-in DC line reactors. This does not stem wide harmonic specification or the costs to |

guaranty performance to any system wide harmonic specification or the costs to meet a system wide specification. If supplied with the system electrical details, Armstrong will run a computer simulation of the system wide harmonics. If system harmonic levels are exceeded Armstrong can also recommend additional harmonic mitigation and the costs for such mitigation.

FLOW READOUT ACCURACY

375 psig at 150°F (26 bar at 65°C)

260 psig at 300°F (21 bar at 150°C)

The Design Envelope model selected will provide flow reading on the controls local keypad & digitally for the BMS. The model readout will be factory tested to ensure $\pm 5\%$ accuracy.

MECHANICAL SEAL DATA

Seal type: AB2 Stationary seat: Sintered silicon carbide
Secondary seal: Viton Rotating hardware: Stainless steel

Spring: Stainless steel

2

OPTIONS

SENSORLESS BUNDLE (STANDARD)



Operation of pump without a remote sensor. Includes:

- Sensorless control
- Flow readout
- Constant flow
- Constant pressure

Minimum system pressure to be maintained ft (m)

* If minimum maintained system pressure is not known: Default to 40% of design head

☐ PARALLEL SENSORLESS



Operation of multiple pumps without a remote sensor

Minimum system pressure to be maintained ft (m)

* If minimum maintained system pressure is not known: Default to 40% of design head

☐ ENERGY PERFORMANCE BUNDLE



Provides energy savings on oversized systems by adjusting pump parameters to on-site conditions. Includes:

- Auto-flow balancing Automatically determines control curve between design flow at on-site system head, and minimum (zerohead) flow for energy savings
- Maximum flow control Limits flow rate to pre-set maximum for potential energy savings

Maximum flow rate gpm (L/s)

*Only available if sensorless bundle is enabled

□ PROTECTION BUNDLE



Protects other flow sensitive equipment by setting limits of pump operation. Includes:

- Minimum flow control Attempts to maintain flow rate to pre-set minimum to protect equipment in system
- Bypass valve control Actuates a bypass valve to protect flow sensitive equipment if pre-set minimum flow rate is reached

Minimum flow rate gpm (L/s)

□ ZONE OPTIMIZATION BUNDLE



Controls pumps to ensure multiple zones are satisfied for heating or cooling

 2 sensor control - Controls pumps in a 2-zone application to ensure both zones are always satisfied for heating or cooling

☐ DUAL SEASON SETUP



Pre-sets heating and cooling parameters for pumps in 2-pipe systems

Cooling

| Duty point | gpm (L/s) at | ft (m) |
|----------------|------------------------|--------|
| Minimum system | m pressure to be maint | ained |
| | ft (m) | |
| Heating | | |
| Duty point | gpm (L/s) at | ft (m) |
| Minimum system | m pressure to be maint | ained |
| | ft (m) | |

OPTIONAL SERVICES

ON-SITE PUMP COMMISSIONING



Where purchased and applicable, onsite commissioning by an Armstrong representative will include setting up communication with the Pump (not wiring to BAS), adjusting parameters to match on-site conditions, register the pumps for enhanced warranty and connect the pumps to the router as part of the activation of Pump Manager.

PUMP MANAGER



As a Performance Management Service, Pump Manager is an online automated fault detection and diagnostic service for sustained performance and enhanced reliability. It includes advanced trending, alerts of variance in performance and automated reports.


Available in yearly increments. Includes an option for a price discount on the Extended Warranty Service.

^{*}Only available if sensorless bundle is enabled

^{*}The Service requires an active internet connection.

3


EXTENDED SPEED

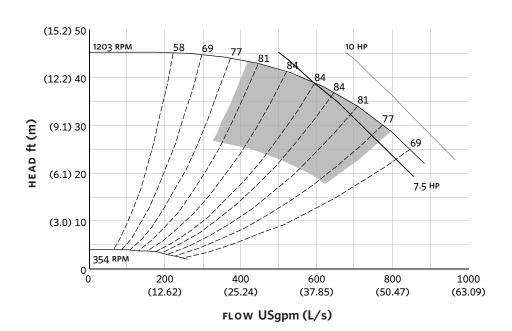

Performance curves are for reference only.

 $Confirm\ current\ performance\ data\ with\ Armstrong\ ACE\ Online\ selection\ software.$

INDOOR

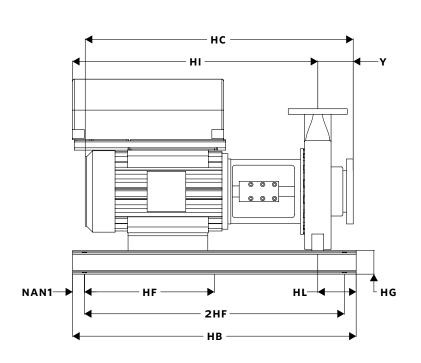

DIMENSION DATA

| INDOOR |
|-----------------|
| (UL TYPE 12/ODE |

Frame size: 254TC

Size: 6×5×11.5

HP: 7.5

RPM: 1200

HA: 18.94 (481)

нв: 48.00 (1219)

HC: 38.59 (980)

HD: 14.00 (356)

HE: 8.84 (225)

HF: 22.00 (559)

2HF: 44.00 (1118)

ZHF. 44.00 (1110)

HG: 4.00 (102)

HI: 29.65 (753)

HL: 6.50 (165)

HV: 15.42 (392)

NaN1: 2.00 (51)

NaN2: 10.10 (257)


x: 14.00 (356)

Y: 6.00 (152)

Weight: 829 (375.9)

Dimensions - inch (mm) Weight - lbs (kg)

- Tolerance of ±0.125" (±3 mm) should be used
- For exact installation, data please write factory for certified dimensions



TORONTO

23 BERTRAND AVENUE TORONTO, ONTARIO CANADA M1L 2P3 +1 416 755 2291

BUFFALO

93 EAST AVENUE NORTH TONAWANDA, NEW YORK U.S.A. 14120-6594 +1 716 693 8813

BIRMINGHAM

HEYWOOD WHARF, MUCKLOW HILL HALESOWEN, WEST MIDLANDS UNITED KINGDOM B62 8DJ +44 (0) 8444 145 145

MANCHESTER

WOLVERTON STREET
MANCHESTER
UNITED KINGDOM
M11 2ET
+44 (0) 8444 145 145

BANGALORE

#59, FIRST FLOOR, 3RD MAIN MARGOSA ROAD, MALLESWARAM BANGALORE, INDIA 560 003 +91 (0) 80 4906 3555

SHANGHAI

UNIT 903, 888 NORTH SICHUAN RD. HONGKOU DISTRICT, SHANGHAI CHINA 200085 +86 (0) 21 5237 0909

SÃO PAULO

RUA JOSÉ SEMIÃO RODRIGUES AGOSTINHO, 1370 GALPÃO 6 EMBU DAS ARTES SAO PAULO, BRAZIL +55 11 4785 1330

ARMSTRONG FLUID TECHNOLOGY ESTABLISHED 1934

ARMSTRONGFLUIDTECHNOLOGY.COM

