

DESIGN ENVELOPE 4322 TANGO 65-125 (2.5×2.5×5) 6512-005.5 **SUBMITTAL**

File No: 102.5025IEC Date: APRIL 18, 2018 Supersedes: 102.5025IEC Date: FEBRUARY 13, 2018

Jop:	_ Representative:	
	Order No:	_ Date:
Engineer:	Submitted by:	Date:
Contractor:	Approved by:	Date:

PUMP DESIGN DATA

No. of pumps:	Тад:
Total system design flow:	L/s (USgpm)
Head: m (ft)	Capacity split%
Flow per pump head:	L/s (USgpm)
Parallel flow:	L/s (USgpm)
Liquid:	Viscosity:
Temperature: °C (°F)	Specific gravity:
Suction: 65 mm (2.5")	Discharge: 65 mm (2.5")

 $\text{MEI} \geq 0.70$

MATERIALS OF CONSTRUCTION

🗆 pn 16

CONSTRUCTION: LPDESF E-coated ductile iron A536 Gr 65-45-12, stainless fitted

CONSTRUCTION: HPDESF

E-coated ductile iron A536 Gr 120-90-2, stainless fitted

MAXIMUM PUMP OPERATING CONDITIONS

PN 16

 16 bar at 49°C (232 psig at 120°F)
 7 bar at 150°C (100 psig at 300°F)

 PN 25

25 bar at 65°C (362 psig at 149°F) 21 bar at 150°C (304 psig at 300°F)

MECHANICAL SEAL DESIGN DATA

See file no. 43.50 for standard mechanical seal details as indicated below

Armstrong seal reference number

□ c1 (a) □ Others: _

FLOW READOUT ACCURACY

The Design Envelope model selected will provide flow reading on the controls local keypad & digitally for the BMS. The model readout will be factory tested to ensure $\pm 5\%$ accuracy.

IECM MOTOR AND CONTROL DATA

kW: 5.5 **RPM:** 3000 Motor enclosure: TEFC Volts: Phase: 3 Efficiency: IE5 Orientation: Standard Protocol (standard): □ BACnet[™] MS/TP □ BACnet[™] TCP/IP □ Modbus rtu Control enclosure:
Indoor – IP 55 □ Outdoor - IP 66 Fused disconnect switch: Consult factory EMI/RFI control: Integrated filter designed to meet en61800-3 Harmonic suppression: Equivalent: 5% AC line reactor - Supporting IEEE 519-1992 requirements** **Cooling:** Fan-cooled, surface cooling **Ambient temperature:** -10°c to +45°c up to 1000 meters above sea level (+14°F to +113°F, 3300 ft) Analog I/O: Two inputs, one output. Output can be configured for voltage or current Digital I/O: Two inputs, two outputs. Outputs can be configured as inputs Relay outputs: Two programmable

Communication port: 1-RS485

** If supplied with the system electrical details, Armstrong will run a computer simulation of the system wide harmonics. If system harmonic levels are exceeded Armstrong can also recommend additional harmonic mitigation and the costs for such mitigation. 2

OPTIONS

SENSORLESS BUNDLE (STANDARD)



Operation of pump without a remote sensor. Includes:

- Sensorless control
- Flow readout
- Constant flow
- Constant pressure

Minimum system pressure to be maintained

m (ft)

* If minimum maintained system pressure is not known: Default to 40% of design head

PARALLEL SENSORLESS (STANDARD)



Operation of multiple pumps without a remote sensor

Minimum system pressure to be maintained m (ft)

* If minimum maintained system pressure is not known: Default to 40% of design head

ENERGY PERFORMANCE BUNDLE



Provides energy savings on oversized systems by adjusting pump parameters to on-site conditions. Includes:

- Auto-flow balancing Automatically determines control curve between design flow at on-site system head, and minimum (zero-head) flow for energy savings
- Maximum flow control Limits flow rate to pre-set maximum for potential energy savings

Maximum flow rate L/s (gpm)

*Only available if sensorless bundle is enabled

PROTECTION BUNDLE



Protects other flow sensitive equipment by setting limits of pump operation. Includes:

- Minimum flow control Attempts to maintain flow rate to pre-set minimum to protect equipment in system
- Bypass valve control Actuates a bypass valve to protect flow sensitive equipment if pre-set minimum flow rate is reached

L/s (gpm)

Maximum flow rate

*Only available if sensorless bundle is enabled

ZONE OPTIMIZATION BUNDLE



Controls pumps to ensure multiple zones are satisfied for heating or cooling

• 2 sensor control - Controls pumps in a 2-zone application to ensure both zones are always satisfied for heating or cooling

DUAL SEASON SETUP



Pre-sets heating and cooling parameters for pumps in 2-pipe systems

Cooling Duty point L/s (gpm)

m (ft) at

Minimum system pressure to be maintained m (ft)

Heating

Duty point L/s (gpm) m (ft) at

Minimum system pressure to be maintained m (ft)

OPTIONAL SERVICES

ON-SITE PUMP COMMISSIONING



PUMP MANAGER




Online service for sustained pump performance and enhanced reliability.

Available in 3 or 5 year terms

- * Requires an internet connection to be provided by building
- * Includes an extended warranty for parts and labour (wearable parts excluded)



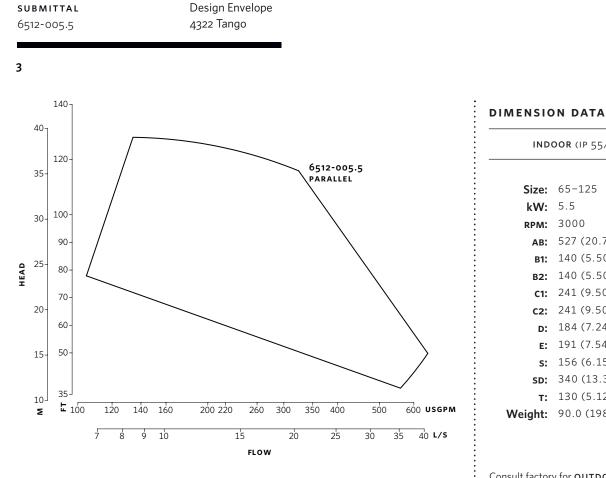

INDOOR (IP 55/TEFC) Size: 65-125 **kW:** 5.5 **RPM:** 3000 **AB:** 527 (20.75) **B1:** 140 (5.50) **B2:** 140 (5.50) 241 (9.50) C1: **c2:** 241 (9.50) **D:** 184 (7.24) **E:** 191 (7.54) s: 156 (6.15) **sp:** 340 (13.39) **T:** 130 (5.12) Weight: 90.0 (198)


Consult factory for **OUTDOOR** (IP 66/TEFC) dimensions

Dimensions – mm (inch) Weight – kg (lbs)

÷


• Tolerance of ±3 mm (±0.125") should be used

• For exact installation, data please write factory for certified dimensions

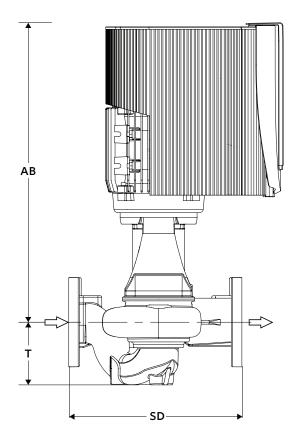

Performance curves are for reference only.

Confirm current performance data with Armstrong ACE Online selection software.

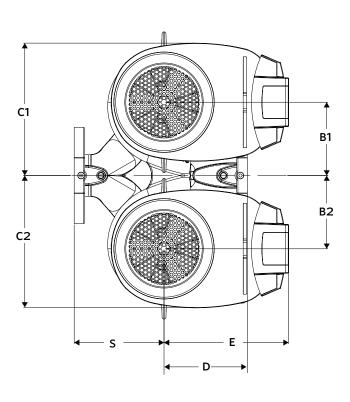

TORONTO

23 BERTRAND AVENUE TORONTO, ONTARIO CANADA M1L 2P3 +1 416 755 2291

BUFFALO

93 EAST AVENUE NORTH TONAWANDA, NEW YORK U.S.A. 14120-6594 +1 716 693 8813

BIRMINGHAM

HEYWOOD WHARF, MUCKLOW HILL HALESOWEN, WEST MIDLANDS UNITED KINGDOM B62 8DJ +44 (0) 8444 145 145

MANCHESTER

WOLVERTON STREET MANCHESTER UNITED KINGDOM M11 2ET +44 (0) 8444 145 145

BANGALORE

#59, FIRST FLOOR, 3RD MAIN MARGOSA ROAD, MALLESWARAM BANGALORE, INDIA 560 003 +91 (0) 80 4906 3555

SHANGHAI

unit 903, 888 north sichuan rd. hongkou district, shanghai china 200085 +86 (0) 21 5237 0909

SÃO PAULO

RUA JOSÉ SEMIÃO RODRIGUES AGOSTINHO, 1370 GALPÃO 6 EMBU DAS ARTES SAO PAULO, BRAZIL +55 11 4781 5500

ARMSTRONG FLUID TECHNOLOGY ESTABLISHED 1934

ARMSTRONGFLUIDTECHNOLOGY.COM

ENERGY SENSE