

FILE NO: 37.587
DATE: Apr. 30, 2010
SUPERSEDES: 37.587
DATE: Jan. 22, 2009

DIRT & AIR SEPARATORS - Model DAS-14

SUBMITTAL

| JOB: | REPRESENTATIVE: | REPRESENTATIVE: | | |
|-------------|-----------------|-----------------|--|--|
| | ORDER NO: | DATE: | | |
| ENGINEER: | SUBMITTED BY: | DATE: | | |
| CONTRACTOR: | APPROVED BY: | DATE: | | |

| Quantity | TAG No. | Model No. | Comments |
|----------|---------|-----------|----------|
| | | | |
| | | | |

DESCRIPTION

Armstrong Dirt & Air Separators are designed to eliminate entrained air and separate debris associated with start-up and maintenance of any hydronic system. The design incorporates a skim valve, used to eliminate floating debris, are movable end cover for coalescing medium access, and an air vent to automatically release air from the separator. The design and construction conforms to ASME Section VIII, Div.1

| TECHNICAL DATA | |
|----------------------------|-------------------|
| Maximum Design Temperature | 250°F (121°C) |
| Maximum Design Pressure | 125 psig (861kPa) |

| MATERIAL OF CONSTRUCTION | | | | |
|----------------------------|-----------------|--|--|--|
| Shell | Carbon Steel | | | |
| Coalescing Medium | Stainless Steel | | | |
| Blow Down Valve (optional) | Bronze | | | |
| Skim Valve (optional) | Bronze | | | |
| Vent: (optional) | Stainless Steel | | | |


TYPICAL SPECIFICATION

Furnish and install on the plans and described herein, an Armstrong DAS Dirt & Air Separator as manufactured by Armstrong. Each separator must be designed with a blow down valve, skim valve, and automatic air vent. The separator must also utilize in its design a stainless steel coalescing medium to aid in the separation of air and dirt in the system entrained water. The separator must be constructed in accordance with the latest revision of the ASME Boiler and Pressure Vessel Code and stamped 125 psi (862 kPa) working pressure.

Each separator shall be Armstrong model DAS or approved equal.

| DIMENSIONS AND WEIGHT | | | | | | | | |
|-----------------------|-------------|----------|-------------|--------------|--------------|-------------|------------|--------------|
| MODEL | FLANGE SIZE | FLOW GPM | D | Н | W | Α | В | WEIGHT |
| DAS-14 | 14 | 6,500 | 30.00 (762) | 78.00 (1981) | 48.00 (1219) | 39.00 (990) | 8.62 (219) | 1800 (816.5) |

Note: All dimensions are in inches (mm) and weights in lbs. (kg).

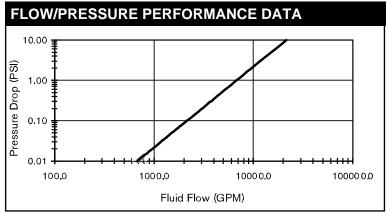

Armstrong Holden Brooke Pullen Ltd.
Wenlock Way
Manchester

United Kingdom, M12 5JL T: +44 (0) 1612 232223 F: +44 (0) 1612 209660



B (TYPICAL)

S. A. Armstrong Limited 23 Bertrand Avenue Toronto, Ontario

Canada, M1L 2P3 T: 416-755-2291 F: 416-759-9101 Armstrong Pumps Inc.

93 East Avenue North Tonawanda, New York U.S.A. 14120-6594 T: (716) 693-8813 F: (716) 693-8970